



Pro-Seal Ultra Shield II-A™

Polycarbon/Polycarbonate Film Sealer

Product Description

Pro-Seal Ultra Shield II-A™ is a polycarbon/polycarbonate hydrocarbon resistant film sealer. This product is available in custom colors.

This product is designed to protect the applied surface against inclement environment and weather conditions.

Advantages

- May be applied over other coating systems
- Prevents moisture penetration
- Prevents freeze-thaw damage, spalling, chipping, and crumbling of brick & concrete
- Designed to at least double the life-time of most existing painted surfaces
- Enhances the appearance of many surfaces while remaining ultra clear
- Helps keep buildings cool by refracting infrared rays
- Penetrates up to 1/8" into the substrate
- Completely opaque to U.V. radiation in frequencies below 2,800 AU

Applications

- Concrete
- Brick
- Metal
- Wood
- Granite
- Marble
- Tile
- CMU Block
- Cinder Block
- And more!

Application

1. Surface must be dry, clean and free of all loose particulate and bond-breaking matter.
2. For specific application instructions or guide specifications, contact Pro-Seal's Technical Department at 800.349.7325 or information@prosealproducts.com

Technical

Information	Value
Material	1 part
Mix time	N/A
Appearance	Liquid
Application	See guide specification
Cure time to touch	1 hour
Full cure	96 hours
Second coat needed within	2 hours
Flammability	Non flammable
Coverage rate	350-900 Sq. Ft. /gallon
Weight per gallon	8.44 lbs
Packaging:	1 gallon, 5 gallons and 55 gallons

Technical Support

Contact our technical dept. at 800.349.7325 or information@prosealproducts.com



16541 Redmond Way • Suite 363C • Redmond, WA 98052
Phone: 800.349.7325 • information@prosealproducts.com
www.prosealproducts.com • © Copyright Pro-Seal

Pro-Seal Ultra Shield II-A™



Polycarbon/Polycarbonate Film Sealer

Specifications

Test	Data	Value
ASTM D 4060-90 Taber abrasion resistance	500 gm head cs 17 wheel wt loss ,000 cycles	36.6 mg
ASTM D 1499 ASTM G 23	Weatherometer	Opaque at 2800 au
ASTM C 309-91 ASTM C 156-91	Water retention by curing	<156 kg >55 kg
ASTM D 1005-84	Dry time rates 15 minutes 1 hour 72 hours	.003 mil .003 mil 1.00 mil
ASTM D 523-89	Specular gloss 80°F-85°F	60
ASTM D 523-89	Ambering upon U.V. exposure	None
ASTM D 522-92	Flexibility 1/4" mandrel 1/8" mandrel	No cracking
Ford open cup	Cup # 4 viscosity @ 77°F	30-40 sec
ASTM D 2697-86	Non volatile matter content	39%
ASTM D 2369-90	V.O.C. content	None
FED STD Test 141 Method 0221	1/8" -1/4" depending on porosity of surface no cracking or breaking of film mandrill	Penetrability flexibility 3/8"
Wear to resistance to weighted traffic	Without cracking or chipping	500lbs/sq in.
FED STD test 141 method 4291	Flash point	150°F min
FED STD test 141 method 4282	Viscosity, #4 ford cup	10 sec
FED STD TEST 141 method 6171	Moisture vapor transmission rate (dry-film ca, grms/sq meters/24 hrs)	1.0
FED STD test 141 method 6061	Weather resistance accelerated weathering closed arc	600 hrs min
FED STD test 141 method 6061	Salt spray resistance 5% solution	600 hrs min
ASTM D622-641	Elongation	125%
ASTM D5434 procedure 1	Corrosion resistance	10%
	Sulphuric acid slightly dull, no rusting	5%

	Sufuouic acid slightly dull, not rusting	5%
	Nitric acid slight dell, no rusting	5%
	Acetic acid slight dull, no rusting	5%
	Chromic acid slightly dull, no rusting	5%
	Calcium chloride slightly dull, no rusting	500 hrs 10%
	Hot water slight dull	180°F 72 hrs
	Sulfur content, ppm	50 max
ASTM D 2143	Hardness –sward (sward value 08.04 tabor)	2.5hrs: 11 5 hrs: 15 24 hrs: 22 168 hrs: 31
	Arasion resistance tabor weight loss/ 500 cycles- grams	0.0515
	Cycles to break through	350
Gardner # 105 Scrub Machine FED STD Test 141	Water & alkali resistance	20,000
	Dielectric strangth volts per mil	10,000
	Ary dry @ .006 mils wet	30 mins
	Dry hard @ 1006 mils wet	72 hrs
	Color fastness	Does not yellow or discolor
	Stain resistance	Dry film does not stain when exposed to oil and grease

* Data based on laboratory tested materials

Pro-Seal Ultra Shield II-A™



16541 Redmond Way • Suite 363C • Redmond, WA 98052
Phone: 800.349.7325 • information@prosealproducts.com
www.prosealproducts.com • © Copyright Pro-Seal


Pro-Seal Ultra Shield II-A™



Polycarbon/Polycarbonate Film Sealer

Pro-Seal Ultra Shield II-A™

Percent of Transmission

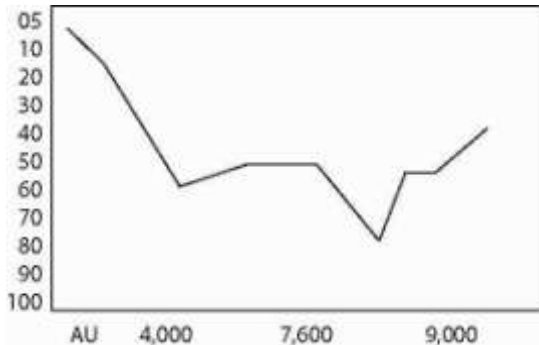

ASTM D 869:
Degree of setting a traffic pain: Dry to touch in less than 12 hours

Chemical Resistance

ASTM	
Cured material	Rating
Aliphatic hydrocarbons	10
Aromatic hydrocarbons	10
Black & print	10
Water	10
Oil	10
Gasoline	10
Adhesion to substrate	10
Atmospheric contaminants	10
Slip & skid	10
Black tire mark	10
Key: 0 = complete failure 10 = excellent	

Cautions

Keep out of reach of children. May cause skin or eye irritation. May be harmful if swallowed. Do not induce vomiting. Use in well ventilated areas. Contact a physician immediately and always seek a physician's advice regarding first aid. Use only in commercial or industrial applications. Use only on intended surfaces. Contact manufacturer for specific application uses. See material safety data sheet for additional cautions.

Limited Warranty

We warrant our product to be free of defects in material and workmanship; and to be in accordance with our company quality control standards. All data, statements, and recommendations, made herein are based upon information we believe to be reliable, but are made without any representation, guarantee, or warranty of accuracy. Our products are sold on the condition that the user himself will evaluate them, as well as our recommendations, to determine their suitability for the user's own purpose before adoption. Also, statements regarding the use of our products or processes are not to be construed as recommendations for their use in violation of any patent rights or in violation of any applicable laws or regulations. Liability under any condition shall be limited to replacement of material only.



16541 Redmond Way • Suite 363C • Redmond, WA 98052
Phone: 800.349.7325 • information@prosealproducts.com
www.prosealproducts.com • © Copyright Pro-Seal